


# MEGAPUMP 88H

## 8" - 200/200MM

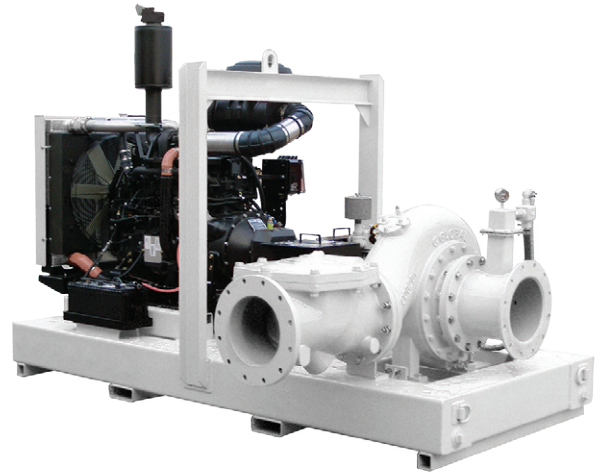

### SPECIFICATIONS

Power Req (KW)	458
Pump Sp (R.P.M)	800 – 1400
Max Flow Litres/Sec	312L/Sec
Suction Lift (m)	9.1
Solids Size (mm)	60
Air Handling Capacity (cfm)	50
Inlet/Outlet (mm)	200/200
Max Delivery Head (m)	138

### DIMENSIONS

Subject To Specification

### PUMP MATERIALS

Pump Casing	White Cast Iron to BS EN 12513
Impeller	White Cast Iron to BS EN 12513 (D 180mm)
Back Liner	White Cast Iron to BS EN 12513
Bearing Frame	Cast Iron to BS EN 1563
Expeller	White Cast Iron to BS EN 12513
Expeller Ring	White Cast Iron to BS EN 12513
Stuffing Box	Cast Iron to BS EN 1563
Shaft Sleeve	White Cast Iron to BS EN 12513
Shaft	Steel to BS EN 10083
Seals	Nitrile Rubber
Priming Method	Diaphragm

### PRIME MOVERS

Engine	Cat C18
Fuel Consumption BEP	
Electric motors also available	

