


# 200 KVA MINING SERIES PERKINS

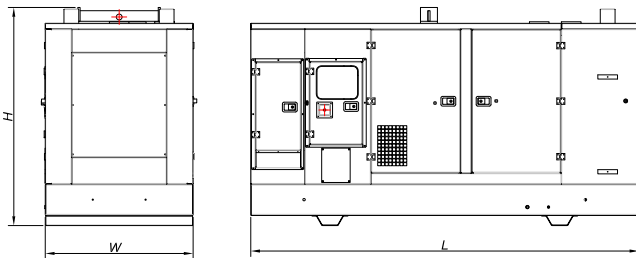

### TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	200
Standby Power (kVA)	223
PRP Power (kW)	160
Standby Power (kW)	178.4

### Weight and Dimensions (mm)

Length (L)	3580
Width (W)	1140
Height (H)	1993
Weight (kg)	3265
Fuel tank capacity (l)	1180

### Noise Level

Acoustic Pressure [LpA] (dBA @7m)	70
Acoustic Power [LwA] (Dba)	97

### Consumption

	PRP Power	
	L/h	Range (hours)
25%	0	0
50%	24	49.2
75%	35	33.7
100%	45.2	26.1

	Standby Power	
	L/h	Range (hours)
25%	0	0
50%	0	0
75%	36.8	32.1
100%	49.1	24.0

### ENGINE

Brand	PERKINS
Model	1306C E87TAG3
Electronic Management	YES
No. of cylinders	6
Engine Capacity (c.c)	8710
Bore (mm)	116
Stroke (mm)	135
Compression ratio	16.6:1
Water cooled	YES
Speed (R.P.M.)	1500
Mechanical Net Power (kWm)	180

### Cooling System

Flow of air from fan (m3/min)	375
-------------------------------	-----

### Lubrication System

Oil sump capacity (l)	27
Maximum oil consumption (% fuel consumption)	0.8

### Electrical System

Number of batteries	2
Battery	12V 44Ah-730A

### Exhaust System

Input diameter (")	4
Output diameter (")	5.5
Body diameter (mm)	453
Exhaust length (mm)	1.340

### ALTERNATOR

Model	LSA 46.2 M5
Electronic Regulation	YES
AVR	R 250
Power (kVA)	200

### ELECTRIC PANEL

Protection Devices	YES
Circuit Breaker	4P 400A R
Control Card	DEEP SEA 7310