


350 KVA MINING SERIES PERKINS

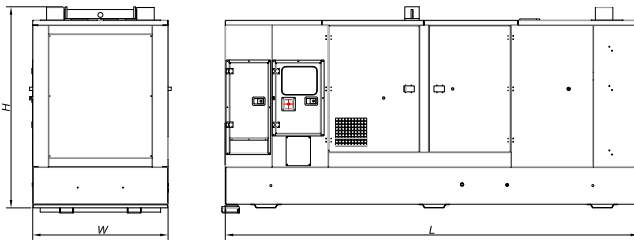

TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	354.6
Standby Power (kVA)	405.6
PRP Power (kW)	283.7
Standby Power (kW)	324.5

Weight and Dimensions (mm)

Length (L)	4580
Width (W)	1500
Height (H)	2235
Weight (kg)	4558
Fuel tank capacity (l)	590

Noise Level

Acoustic Pressure [LpA] (dBA @7m)	70
Acoustic Power [LwA] (Dba)	97

Consumption

	PRP Power	
	L/h	Range (hours)
25%	0	0
50%	36.4	16.2
75%	53.2	11.1
100%	70.6	8.4

	Standby Power	
	L/h	Range (hours)
25%	0	0
50%	0	0
75%	60.1	9.8
100%	80.2	7.4

ENGINE

Brand	PERKINS
Model	2206A E13TAG2
Electronic Management	YES
No. of cylinders	6
Engine Capacity (c.c)	12500
Bore (mm)	130
Stroke (mm)	157
Compression ratio	16.3:1
Water cooled	YES
Speed (R.P.M.)	1500
Mechanical Net Power (kWm)	305

Cooling System

Flow of air from fan (m3/min)	654
-------------------------------	-----

Lubrication System

Oil sump capacity (l)	40
Maximum oil consumption (% fuel consumption)	0.1

Air intake system

Aspirated air flow (m3/min)	25.1
-----------------------------	------

Electrical System

Number of batteries	2
Battery	12V 44Ah-730A

Exhaust System

Input diameter (")	6
Output diameter (")	7.6
Body diameter (mm)	611
Exhaust length (mm)	1.350
T° gas emission (°C)	630
Gas flow (m3/min)	56.6

ALTERNATOR

Model	LSA 47.2 VS2
Electronic Regulation	YES
AVR	R 450
Power (kVA)	365

ELECTRIC PANEL

Protection Devices	YES
Circuit Breaker	4P 630A R
Control Card	DEEP SEA 7310