


# 275 KVA STANDBY OPEN SET PERKINS

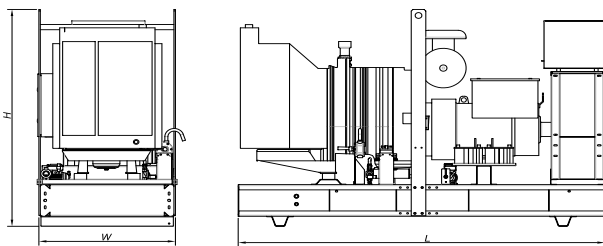

## TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	249.6
Standby Power (kVA)	274.9
PRP Power (kW)	199.6
Standby Power (kW)	219.9

## Weight and Dimensions (mm)

Length (L)	3020
Width (W)	1150
Height (H)	2060
Weight (kg)	2330
Fuel tank capacity (l)	415

## Consumption

	PRP Power	
	L/h	Range (hours)
25%	0	0
50%	26.4	15.7
75%	39.5	10.5
100%	49.5	8.4

	Standby Power	
	L/h	Range (hours)
25%	0	0
50%	0	0
75%	43	9.7
100%	49.8	8.3

## ENGINE

Brand	PERKINS
Model	1306C E87TAG6
Electronic Management	YES
No. of cylinders	6
Engine Capacity (c.c)	8710
Bore (mm)	116
Stroke (mm)	135
Compression ratio	16.6:1
Water cooled	YES
Speed (R.P.M)	1500
Mechanical Net Power (kWm)	239
Fuel tank capacity (l)	415

## Cooling System

Flow of air from fan (m3/min)	375
-------------------------------	-----

## Lubrication System

Oil sump capacity (l)	27
Maximum oil consumption (% fuel consumption)	0.8

## Air intake system

Aspirated air flow (m3/min)	16.1
-----------------------------	------

## Electrical System

Number of batteries	2
Battery	12V 44Ah-730A

## Exhaust System

Input diameter (")	4
Output diameter (")	4
Body diameter (mm)	198
Exhaust length (mm)	740
T <sup>a</sup> gas emission (°C)	528
Gas flow (m3/min)	44.5

## ALTERNATOR

Model	LSA 46.2 L6
Electronic Regulation	YES
AVR	R 450
Power (kVA)	275

## ELECTRIC PANEL

Protection Devices	YES
Control Card	DEEP SEA 7320