


# 1650 KVA STANDBY OPEN SET PERKINS

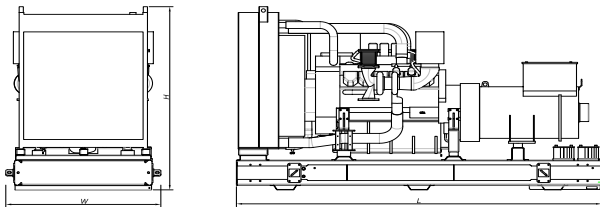

## TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	1500
Standby Power (kVA)	1650
PRP Power (kW)	1200
Standby Power (kW)	1320

## Weight and Dimensions (mm)

Length (L)	5250
Width (W)	2200
Height (H)	2810
Weight (kg)	10506

## Consumption

	PRP Power	
	L/h	Range (hours)
25%	0	0
50%	165.5	0
75%	239.5	0
100%	317.9	0

	Standby Power	
	L/h	Range (hours)
25%	0	0
50%	0	0
75%	264	0
100%	353	0

## ENGINE

Brand	PERKINS
Model	4012-46 TAG2A
Electronic Management	YES
No. of cylinders	12
Engine Capacity (c.c)	45842
Bore (mm)	160
Stroke (mm)	190
Compression ratio	13:1
Water cooled	YES
Speed (R.P.M)	1500
Mechanical Net Power (kWm)	1395

## Cooling System

Flow of air from fan (m3/min)	1944
-------------------------------	------

## Lubrication System

Oil sump capacity (l)	178
Maximum oil consumption (% fuel consumption)	1

## Air intake system

Aspirated air flow (m3/min)	120
-----------------------------	-----

## Electrical System

Number of batteries	4
Battery	12V 44Ah-730A

## Exhaust System

T <sup>a</sup> gas emission (°C)	500
Gas flow (m3/min)	309

## ALTERNATOR

Model	LSA 50.2 L8
Electronic Regulation	YES
AVR	R 450
Power (kVA)	1650

## ELECTRIC PANEL

Protection Devices	YES
Control Card	DEEP SEA 7320