


165 KVA STANDBY SILENCED SET JOHN DEERE

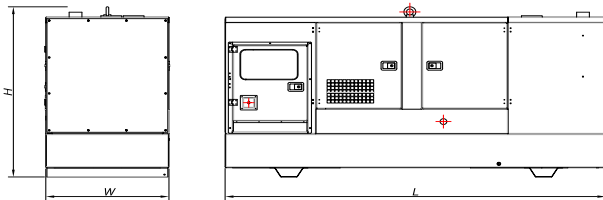

TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	150
Standby Power (kVA)	165
PRP Power (kW)	120
Standby Power (kW)	132

Weight and Dimensions (mm)

Length (L)	3400
Width (W)	1100
Height (H)	1755
Weight (kg)	2310
Fuel tank capacity (l)	277

Noise Level

Acoustic Pressure [LpA] (dBA @7m)	70
Acoustic Power [LwA] (Dba)	97

Consumption

	PRP Power	
	L/h	Range (hours)
25%	9.3	29.8
50%	18	15.4
75%	26.6	10.4
100%	34.4	8.1

	Standby Power	
	L/h	Range (hours)
25%	10.1	27.4
50%	19.8	14
75%	28.9	9.6
100%	37.8	7.3

ENGINE

Brand	JOHN DEERE
Model	6068HF158-50HZ
No. of cylinders	6
Engine Capacity (c.c)	6800
Bore (mm)	106
Stroke (mm)	127
Compression ratio	17:1
Water cooled	YES
Speed (R.P.M)	1500
Mechanical Net Power (kWm)	148
Fuel tank capacity (l)	277

Cooling System

Flow of air from fan (m3/min)	162
-------------------------------	-----

Lubrication System

Oil sump capacity (l)	19
Maximum oil consumption (% fuel consumption)	0.2

Air intake system

Aspirated air flow (m3/min)	11.2
-----------------------------	------

Electrical System

Number of batteries	1
Battery	12V 44Ah-730A

Exhaust System

Input diameter (")	4
Output diameter (")	4.5
Body diameter (mm)	380
Exhaust length (mm)	1.570
T° gas emission (°C)	575
Gas flow (m3/min)	25.4

ALTERNATOR

Model	LSA 44.2 M95
Electronic Regulation	YES
AVR	R 250
Power (kVA)	165

ELECTRIC PANEL

Protection Devices	YES
Control Card	DEEP SEA 7320