


88 KVA STANDBY SILENCED SET PERKINS

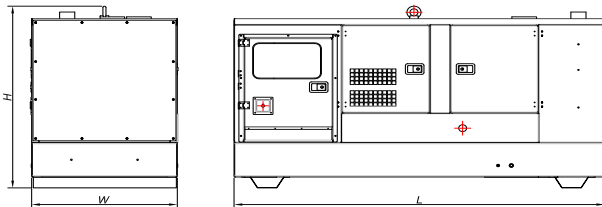

TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	80
Standby Power (kVA)	88
PRP Power (kW)	64
Standby Power (kW)	70.4

Weight and Dimensions (mm)

Length (L)	2800
Width (W)	1100
Height (H)	1585
Weight (kg)	1572
Fuel tank capacity (l)	178

Noise Level

Acoustic Pressure [LpA] (dBA @7m)	68
Acoustic Power [LwA] (Dba)	94

Consumption

	PRP Power	
	L/h	Range (hours)
25%	5.2	34.2
50%	9.7	18.4
75%	14	12.7
100%	18.7	9.5

	Standby Power	
	L/h	Range (hours)
25%	0	0
50%	0	0
75%	15.3	11.6
100%	20.5	8.7

ENGINE

Brand	PERKINS
Model	1104A-44TG2
No. of cylinders	4
Engine Capacity (c.c)	4400
Bore (mm)	105
Stroke (mm)	127
Compression ratio	17.2:1
Water cooled	YES
Speed (R.P.M)	1500
Mechanical Net Power (kWm)	79.1
Fuel tank capacity (l)	178

Cooling System

Flow of air from fan (m3/min)	89
Water Jacket Heater	YES

Lubrication System

Oil sump capacity (l)	8
Maximum oil consumption (% fuel consumption)	0.15

Air intake system

Aspirated air flow (m3/min)	5.14
-----------------------------	------

Electrical System

Number of batteries	1
Battery	12V 60 Ah. 680A

Exhaust System

Input diameter (")	3
Output diameter (")	3.5
Body diameter (mm)	280
Exhaust length (mm)	1.285
T ^a gas emission (°C)	580
Gas flow (m3/min)	13.3

ALTERNATOR

Model	LSA 43.2 L8
AVR	R 250
Power (kVA)	88

ELECTRIC PANEL

Protection Devices	YES
Control Card	DEEP SEA 7320