


# 406 KVA STANDBY SILENCED SET PERKINS

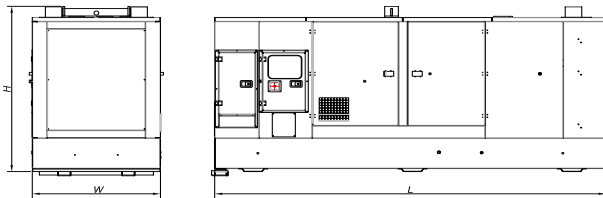

## TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	354.6
Standby Power (kVA)	405.6
PRP Power (kW)	283.7
Standby Power (kW)	324.5

## Weight and Dimensions (mm)

Length (L)	4580
Width (W)	1500
Height (H)	2235
Weight (kg)	4510
Fuel tank capacity (l)	590

## Noise Level

Acoustic Pressure [LpA] (dBA @7m)	70
Acoustic Power [LwA] (Dba)	97

## Consumption

	PRP Power	
	L/h	Range (hours)
25%	0	0
50%	36.4	16.2
75%	53.2	11.1
100%	70.6	8.4

	Standby Power	
	L/h	Range (hours)
25%	0	0
50%	0	0
75%	60.1	9.8
100%	80.2	7.4

## ENGINE

Brand	PERKINS
Model	2206A E13TAG2
Electronic Management	YES
No. of cylinders	6
Engine Capacity (c.c)	12500
Bore (mm)	130
Stroke (mm)	157
Compression ratio	16.3:1
Water cooled	YES
Speed (R.P.M)	1500
Mechanical Net Power (kWm)	349
Fuel tank capacity (l)	590

## Cooling System

Flow of air from fan (m3/min)	654
-------------------------------	-----

## Lubrication System

Oil sump capacity (l)	40
Maximum oil consumption (% fuel consumption)	0.1

## Air intake system

Aspirated air flow (m3/min)	27.8
-----------------------------	------

## Electrical System

Number of batteries	2
Battery	12V 44Ah-730A

## Exhaust System

Input diameter (")	6
Output diameter (")	7.6
Body diameter (mm)	611
Exhaust length (mm)	1.350
T <sup>a</sup> gas emission (°C)	630
Gas flow (m3/min)	64.8

## ALTERNATOR

Model	LSA 47.2 VS2
Electronic Regulation	YES
AVR	R 450
Power (kVA)	420

## ELECTRIC PANEL

Protection Devices	YES
Control Card	DEEP SEA 7320