


660 KVA STANDBY OPEN SET VOLVO

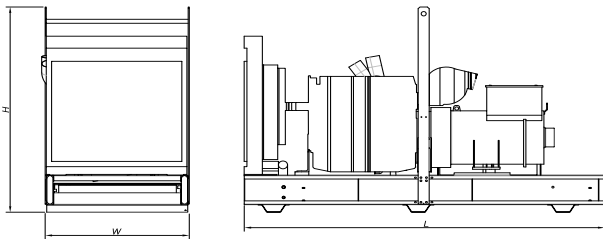

TECHNICAL INFORMATION

Voltage (V):	400/230
Frequency (Hz):	50
PRP Power (kVA)	597.4
Standby Power (kVA)	657.9
PRP Power (kW)	477.9
Standby Power (kW)	526.3

Weight and Dimensions (mm)

Length (L)	3950
Width (W)	1550
Height (H)	2560
Weight (kg)	4492
Fuel tank capacity (l)	995

Consumption

	PRP Power	
	L/h	Range (hours)
25%	32.2	30.9
50%	59	16.9
75%	88.4	11.3
100%	119.7	8.3

	Standby Power	
	L/h	Range (hours)
25%	34.9	28.5
50%	65.1	15.3
75%	97.7	10.2
100%	132.9	7.5

ENGINE

Brand	VOLVO
Model	TAD 1642 GE
Electronic Management	YES
No. of cylinders	6
Engine Capacity (c.c)	16120
Bore (mm)	144
Stroke (mm)	165
Compression ratio	16.5:1
Water cooled	YES
Speed (R.P.M)	1500
Mechanical Net Power (kWm)	554
Fuel tank capacity (l)	995

Cooling System

Flow of air from fan (m3/min)	600
Water Jacket Heater	YES

Lubrication System

Oil sump capacity (l)	48
Maximum oil consumption (% fuel consumption)	0.1

Air intake system

Aspirated air flow (m3/min)	40.6
-----------------------------	------

Electrical System

Number of batteries	2
Battery	12V 44Ah-730A

Exhaust System

Input diameter (")	6
Output diameter (")	6
Body diameter (mm)	381
Exhaust length (mm)	1.300
T ^a gas emission (°C)	494
Gas flow (m3/min)	100.7

ALTERNATOR

Model	LSA 47.2 L9
Electronic Regulation	YES
AVR	R 450
Power (kVA)	660

ELECTRIC PANEL

Protection Devices	YES
Control Card	DEEP SEA 7320